

1)

hard drive serial number motherboard ID

""HASP.doc""

2)

3)

AMAC address

B CPUcharacteristics

C UUID

1)

2)

3) v2ch2h


4)

5) h2h

c2v

c2v


RUSc2v"update"

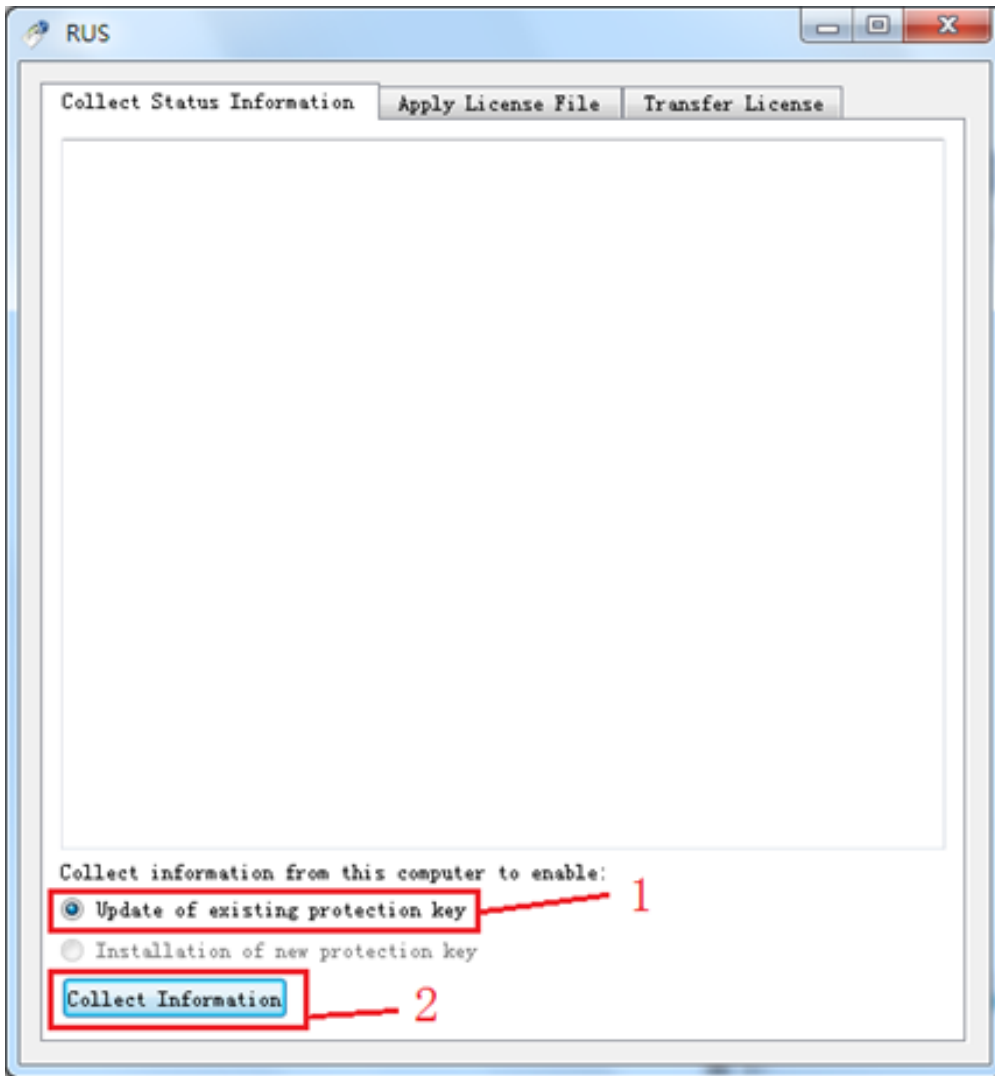

<http://localhost:1947> "Sentinel Keys"



1 c2vv2cRUSv2cupdate

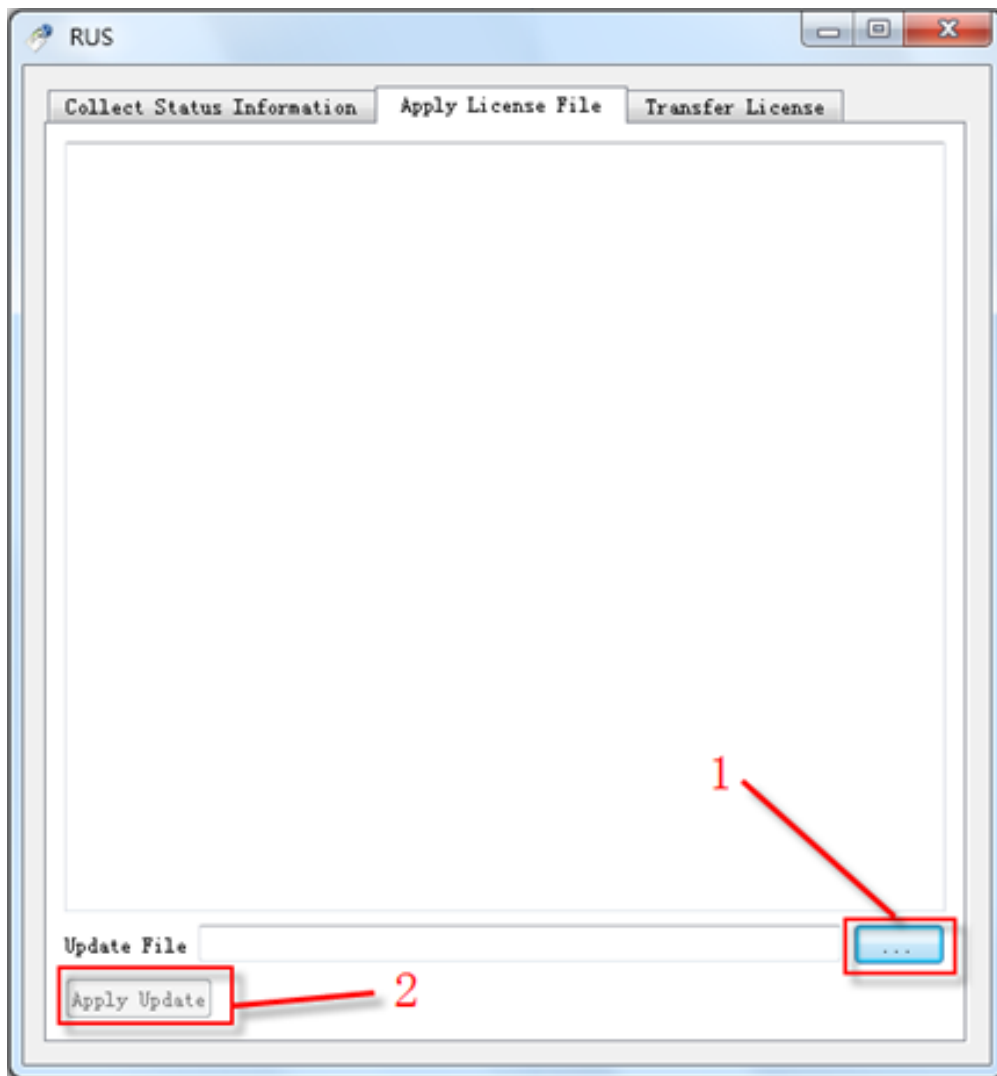

2

h2h